


# Flexitank Goliath


Depósito de líquidos para contenedores  
Liquid container constructed for containers





# Flexitank Goliath

Depósito de líquidos para contenedores  
Liquid container constructed for containers

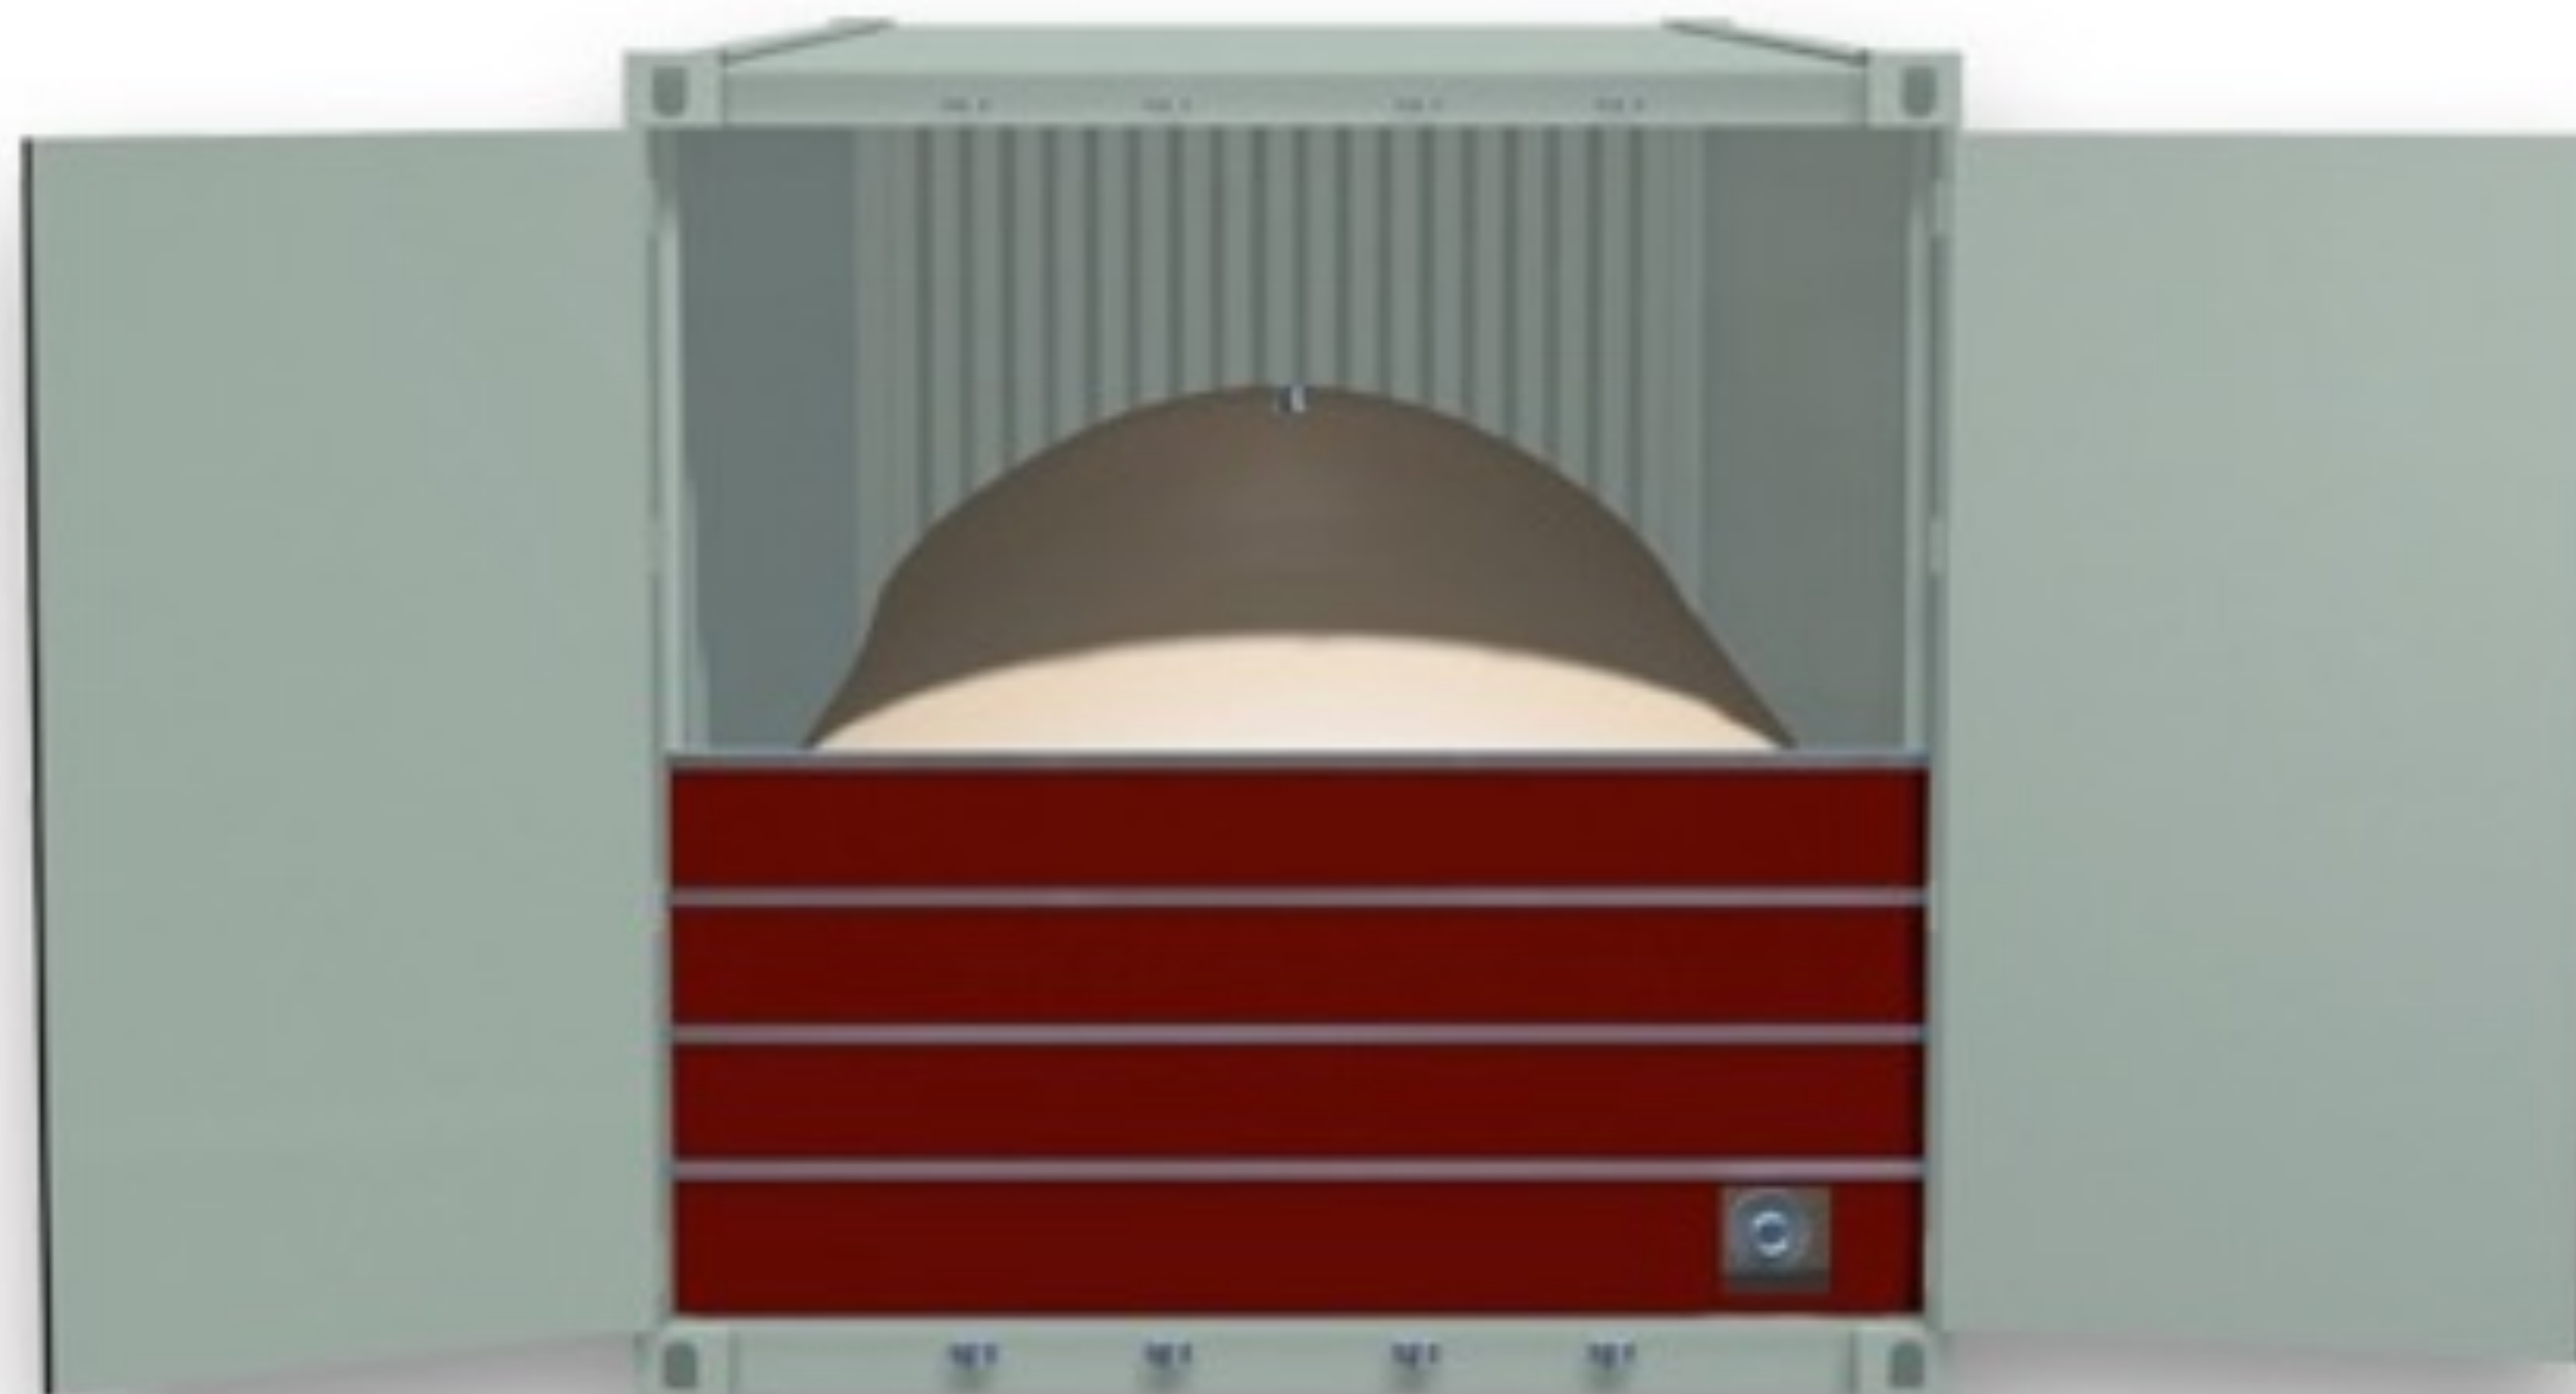


Contenedor de líquidos fabricado con múltiples capas de polietileno y cubierta externa de polipropileno, con capacidad de carga entre 14000 y 24000 litros.

Para carga superior y carga inferior.

Material externo de rafia.

Aceites | Zumos | Agua | Vino | Detergentes |  
Aditivos | Emulsiones | Lubricantes | Tintas |  
Concentrados | Farmacéuticos | etc ...

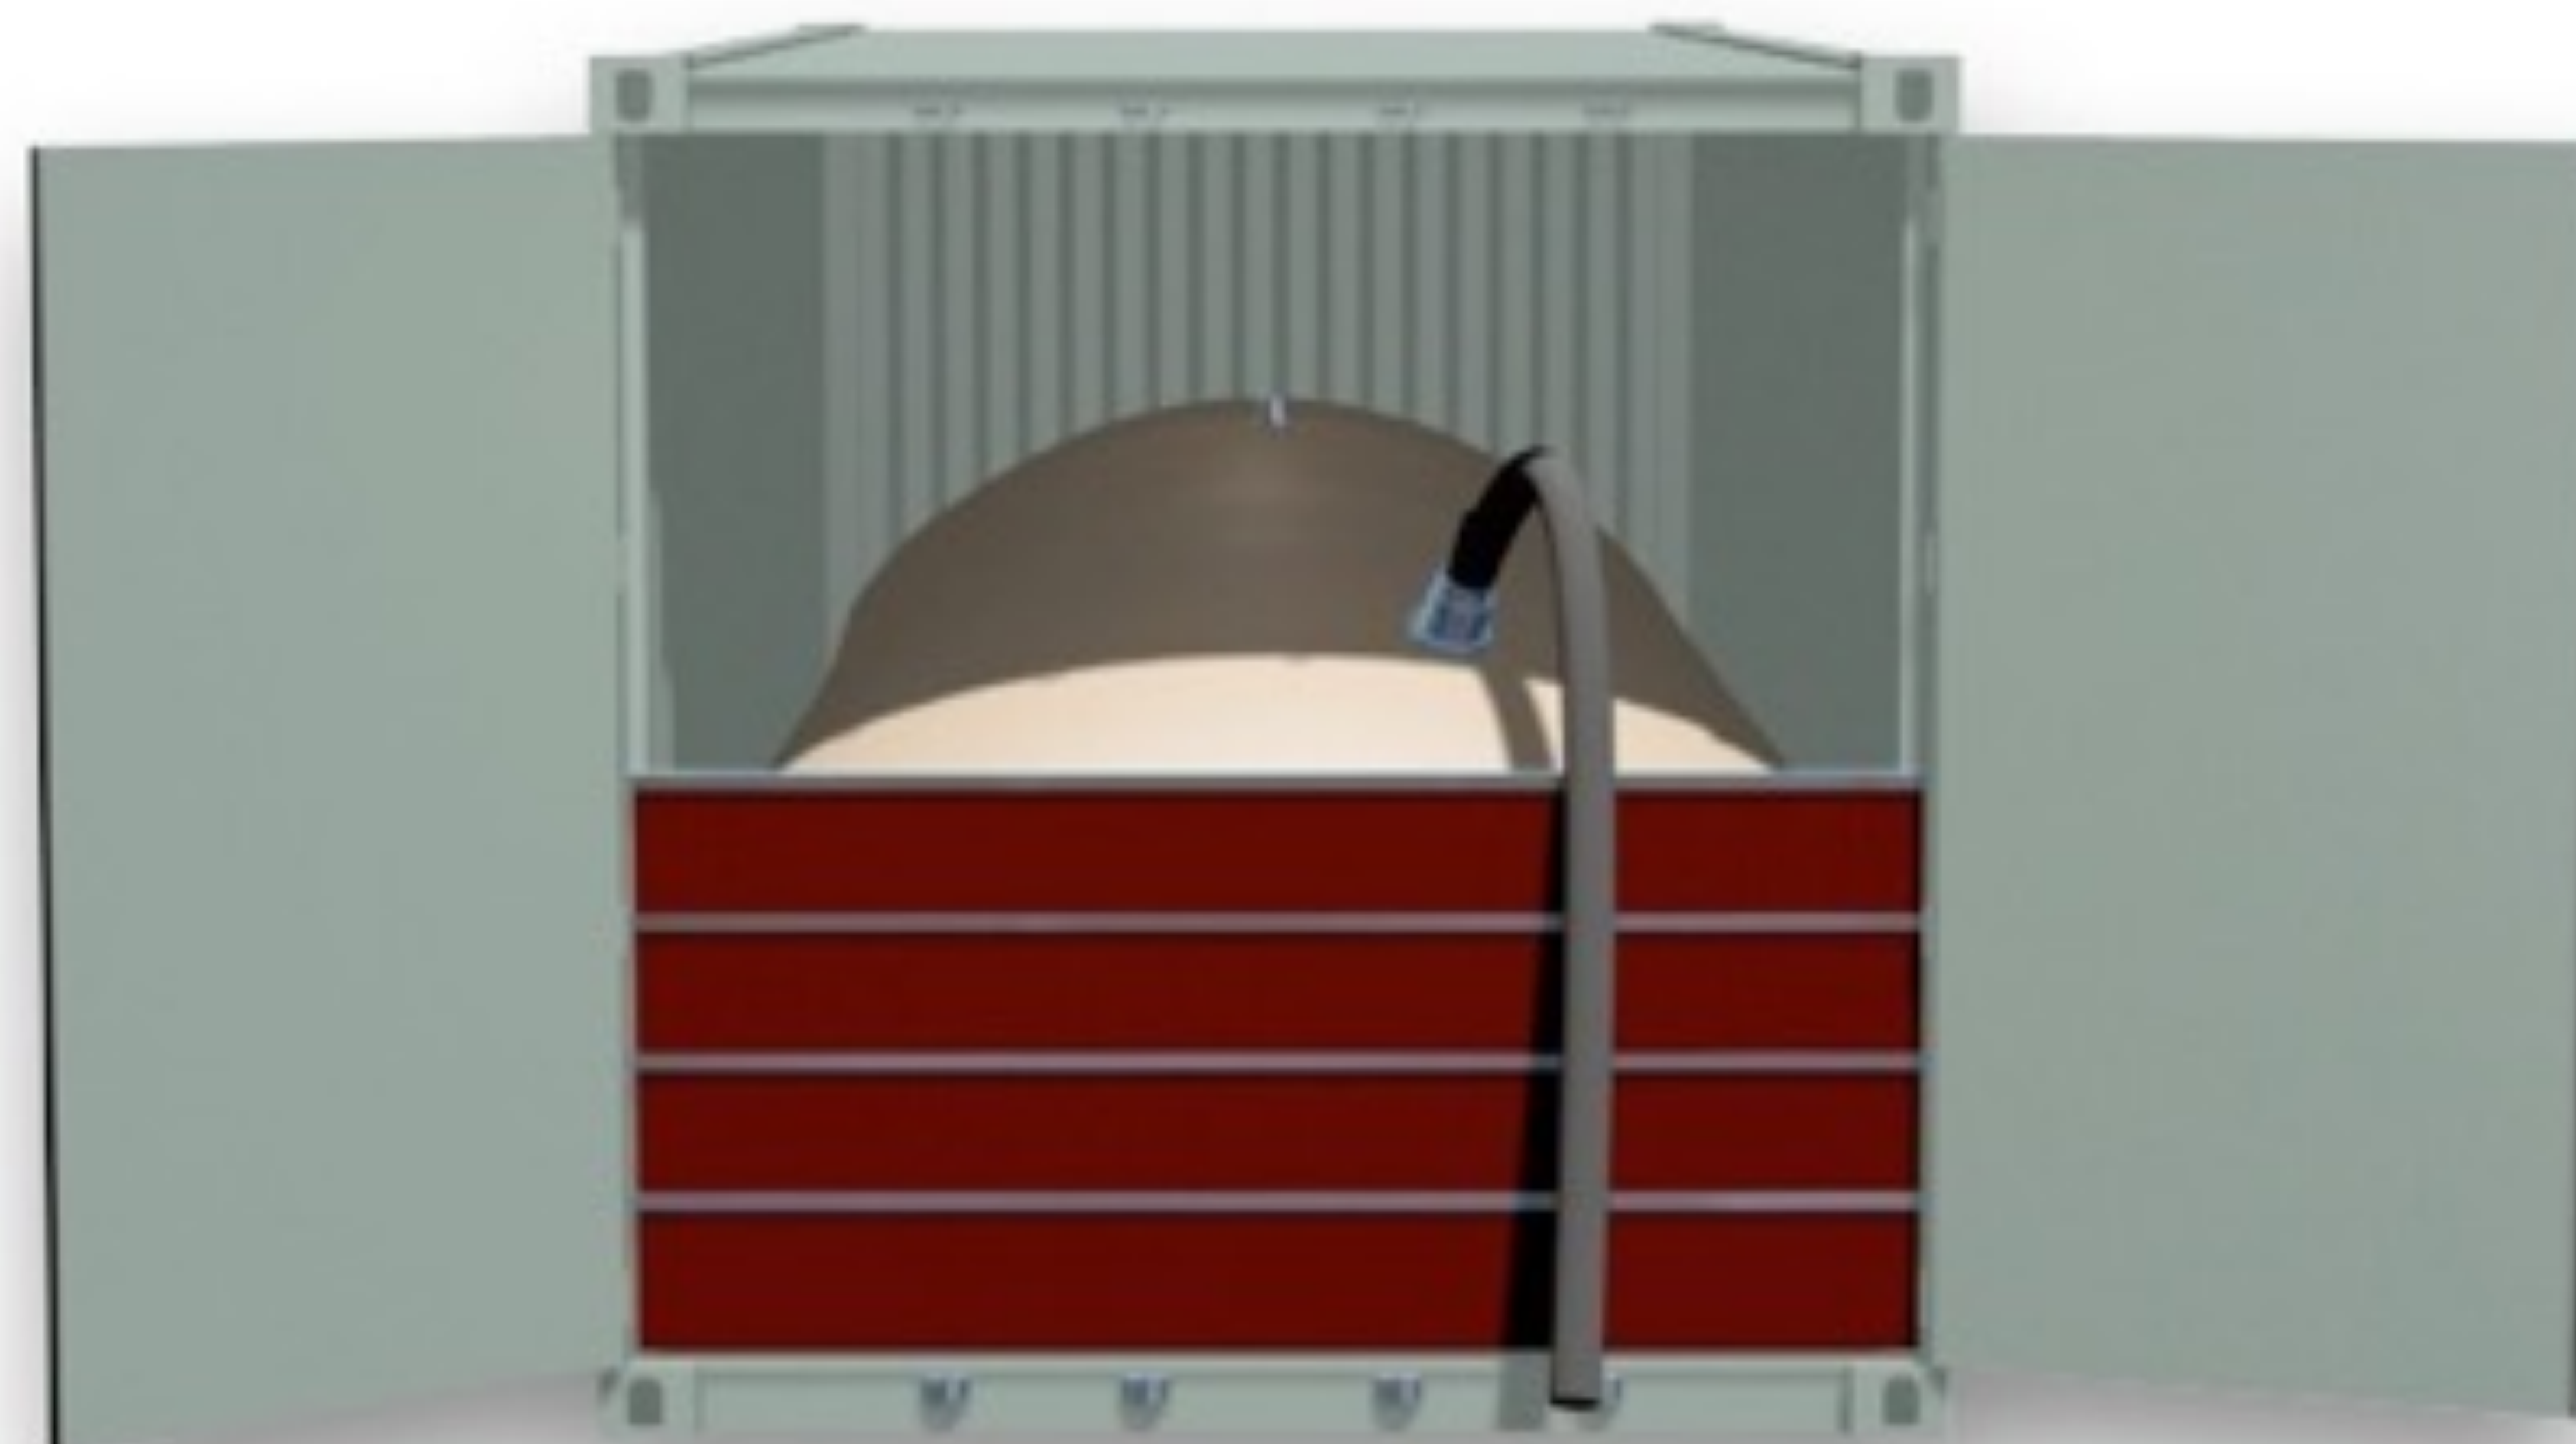

*Liquid container constructed of multiple layers of polyethylene with an outer covering of woven polypropylene with volume from 14000 up to 24000 liters.*

*For top loading and bottom loading.*


*Tape external material.*

*Oils | Juices | Water | Wine | Detergents |  
Additives | Emulsions | Lubricants | Inks |  
Concentrated | Pharmaceuticals | etc ...*



# Flexitank Goliath

Depósito de líquidos para contenedores  
Liquid container constructed for containers

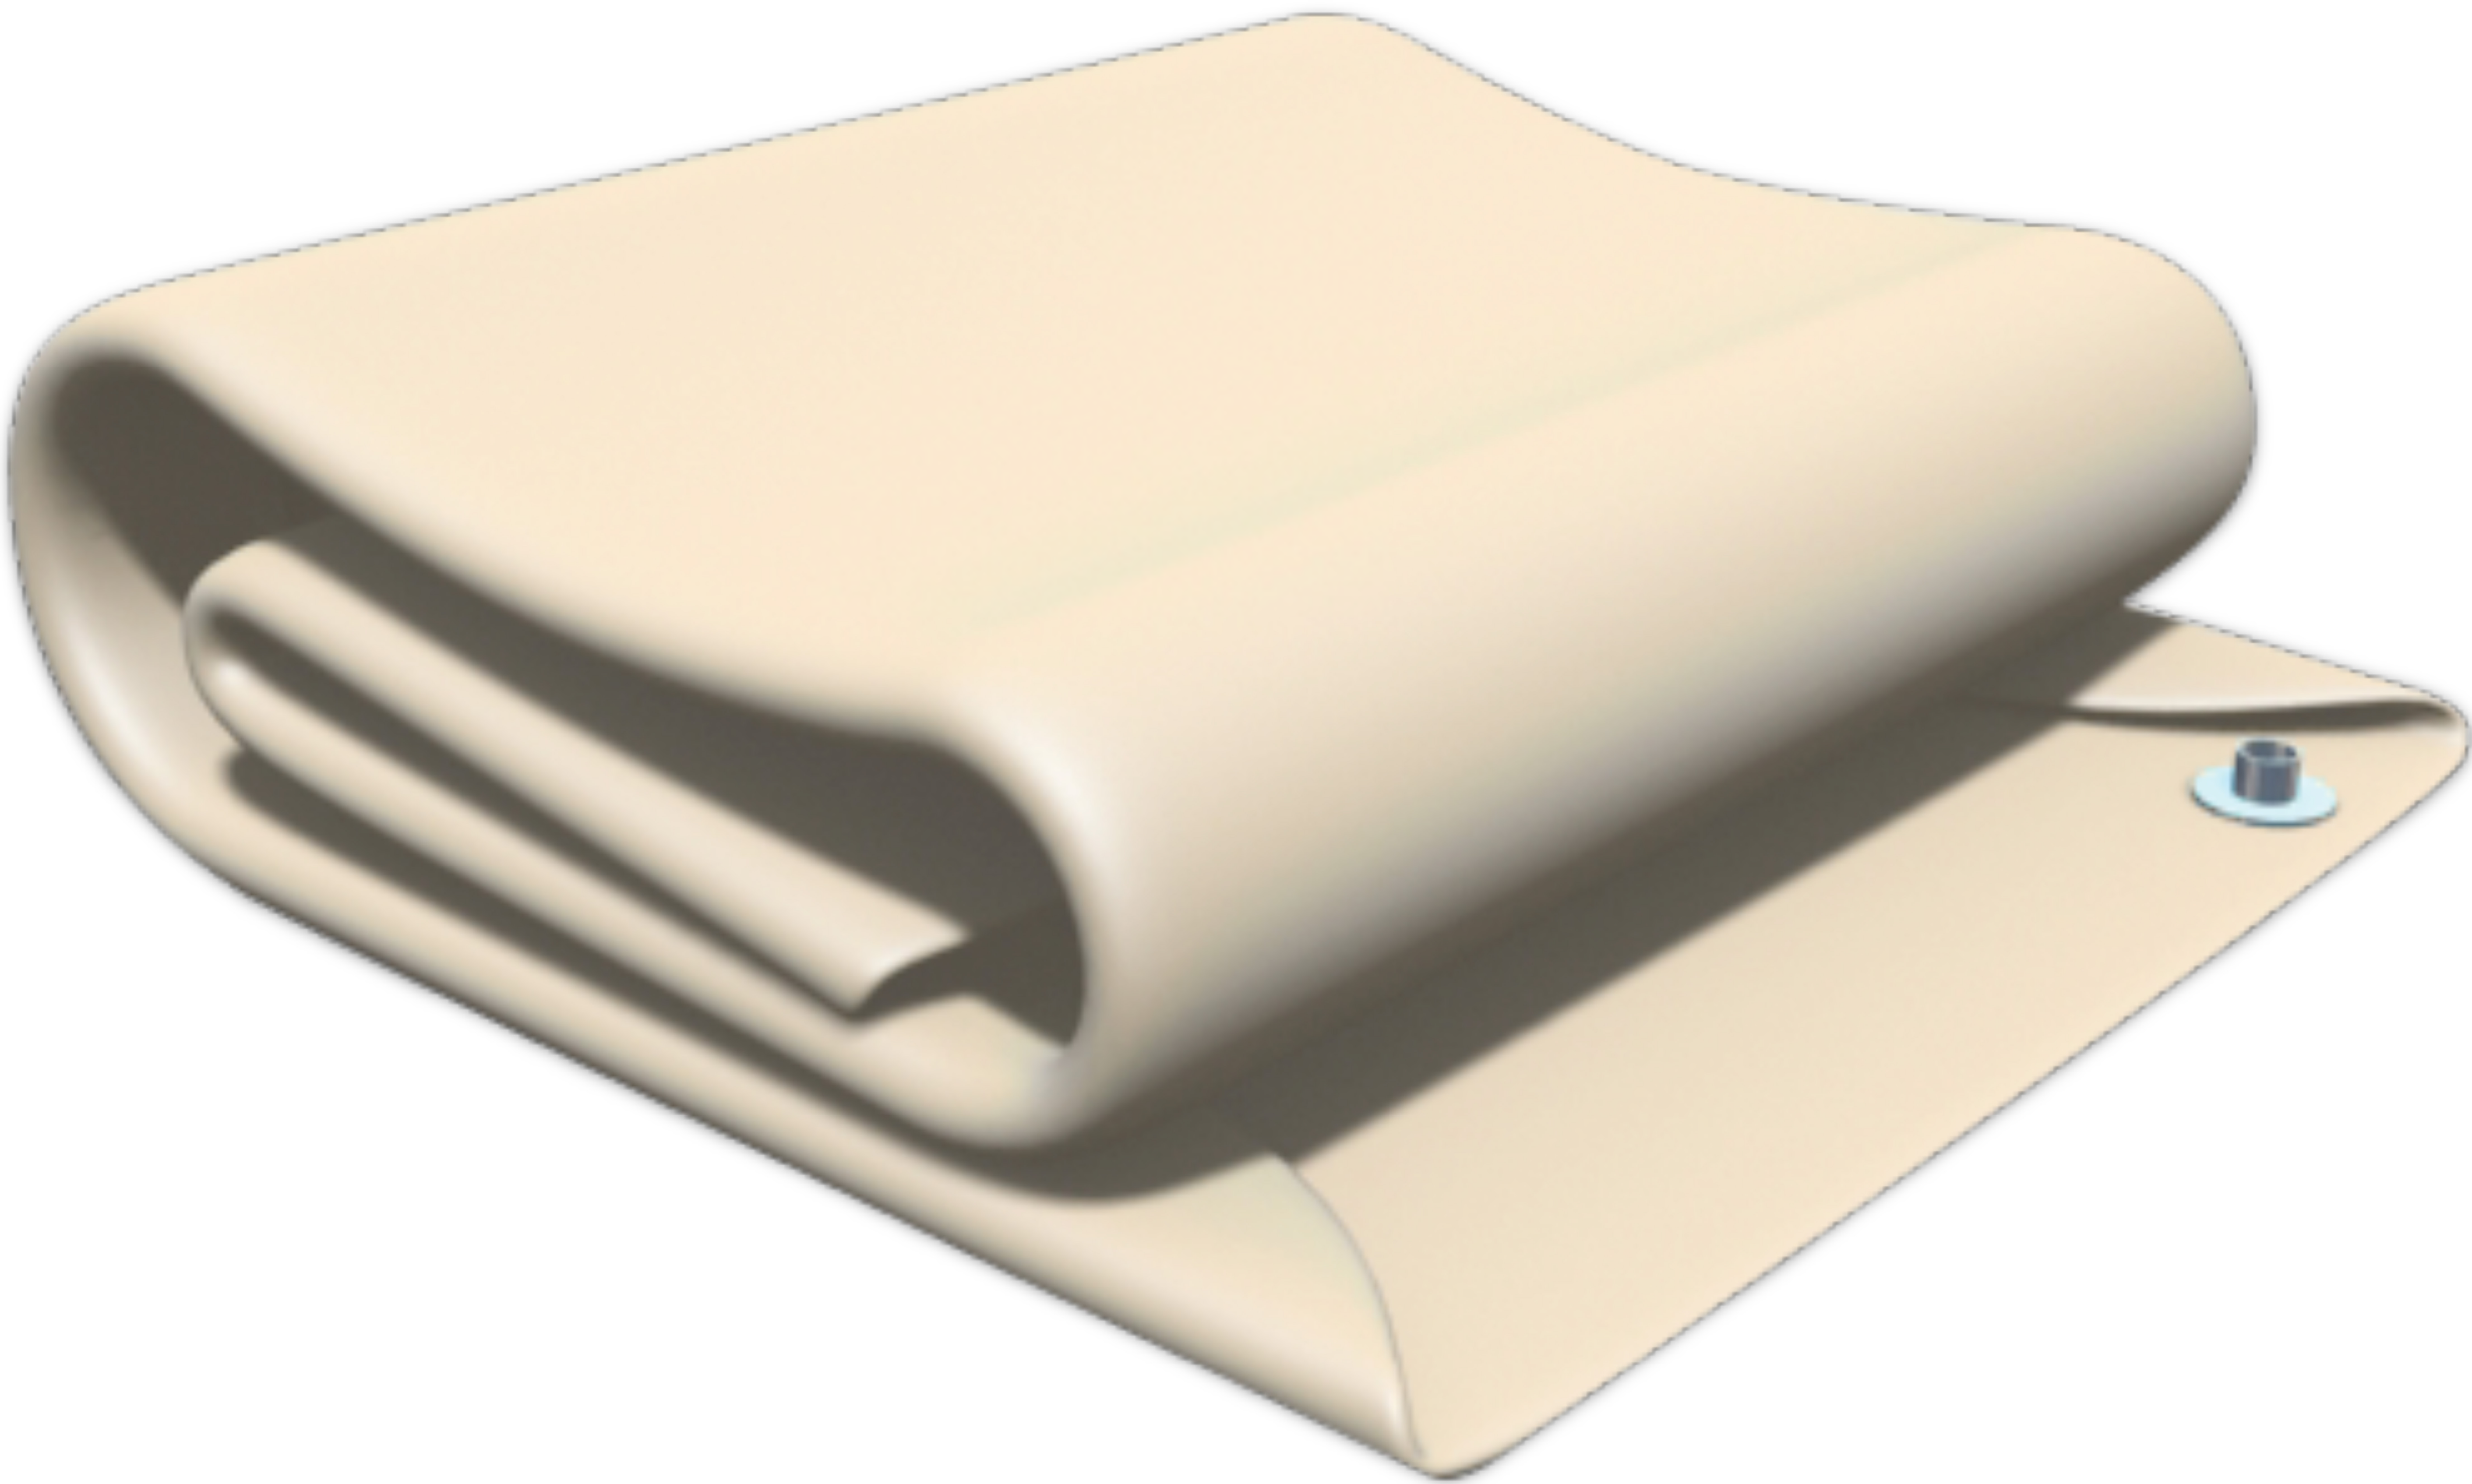

Outer Cover		
Fabric	Average Weight	240 g/m <sup>2</sup>
	Coating	25 g/m <sup>2</sup>
	Colour	White
	Tensile Strength Warp	Dan/ 5 cm 300 Kg
	Tensile Strength Weft	Dan / 5 cm 280 Kg
	Elongation	13.60 %
Valve	Type	3" Male Cam-Lock
	Raw material	Polypropylene + Stainless Steel
Valve Cover Plug	Type	3" screw in
	Raw material	Polypropylene
Lashing Belts		
Webbing	Raw Material	Polypropylene Multifilament
	Average Weight	60 g/lnm
	Width	55 mm
	Tensile Strength Warp	2000 Kg
	Elongation	18 %
Inner Liner		
PE Film	Thickness	125 mic
	Total Layers	2
Mechanical Performance	Dart Drop	600 g (body)
		300 g (fold)
	Tensile Strength	30 Mpa (MD)
		35 Mpa (TD)
	Elongation	550% (MD)
		900% (TD)
	Yield	7 Mpa (MD)
		8 Mpa (TD)
Tear Resistance	10 g/μm (MD)	
	22 g/μm (TD)	
Food Approval Legislations		
	FDA	21 CFR 177.1520 Polyolefin's
	EU	Directive 90/128/EEC





## CARPINTERÍA RIQUELME

**C/ Manzano, 11 / Pol. Ind. El Tapiado 30500 Molina de Segura (Murcia)**

**Teléfono: 968 646 081 | Móvil: 619 038 658**

visite: [www.carpinteriariquelme.com](http://www.carpinteriariquelme.com)